25 Years
POWER SOLUTIONS INMESOL
1990 / 2015

AH 220-M - HONDA GX 160/ GASOLINE 3000 rpm | 50 Hz

SINGLE PHASE
230 V

TECHNICALS SPECIFICATIONS

Image for guidance purposes.

Model:

AH 220

Gen set composed of engine and alternator perfectly assembled and fitted in a practical tubular chasis, that is adding great strenght and versatility.

STANDBY POWER: (LTP "Limited Time Power" norma ISO 8528-1)	2,2 kVA

Genset general characteristics

Standby power LTP (kVA)	2,2
Frequency (Hz)	50
R.p.m.	3000
Voltage (V)	230
(Cos ø)	1

ENGINE CHARACTERISTICS

MAKE	MODEL
HONDA	GX 160

Mechanical effect power (kWm)	2,5
No. cylinders	1
Diameter x stroke (mm)	68x45
Compresion ratio	8,5:1
Cooling system	Air
Series regulator	Mechanical
Start	Recoil Start
Fuel	Gasoline
Fuel tank capacity (L)	3,1
Fuel comsumption 100% (L/h)	1,2
Oil tank capacity (L)	0,3

POWER SOLUTIONS INMESOL

INMESOL, S.L.
Ctra. de Fuente Álamo, 2 · 30153 CORVERA - Murcia · SPAIN

ESPAÑA
Teléfono: +34 968 380 129
Fax: +34 968 380 504
E-mail: **ventas@inmesol.com**

INTERNATIONAL
Phone: +34 968 380 879
Fax: +34 968 380 400
E-mail: **sales@inmesol.com**

www.inmesol.com

25 Years
POWER SOLUTIONS INMESOL
1990 / 2015

AH 220-M - HONDA GX 160/ GASOLINE 3000 rpm | 50 Hz

SINGLE PHASE
230 V

ALTERNATOR CHARACTERISTICS

Voltage (V)	230
Frequency (Hz)	50
R.p.m.	3000
No. poles	2
Protection degree IP	21
Insulation	H

SOCKETS DESCRIPTION:

Single phase version: 2 MONOPHASE SCHUKO SOCKETS 16A and termic protection.

DIMENSIONS AND WEIGHT

Lenght (mm)	560
Width (mm)	430
Height (mm)	480
Weight (kg)	36

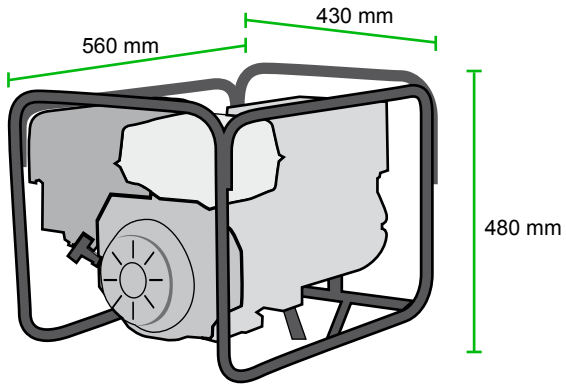

POWER SOLUTIONS INMESOL

INMESOL, S.L.
Ctra. de Fuente Álamo, 2 · 30153 CORVERA - Murcia · SPAIN

ESPAÑA
Teléfono: +34 968 380 129
Fax: +34 968 380 504
E-mail: ventas@inmesol.com

INTERNATIONAL
Phone: +34 968 380 879
Fax: +34 968 380 400
E-mail: sales@inmesol.com

www.inmesol.com